


# 108.08

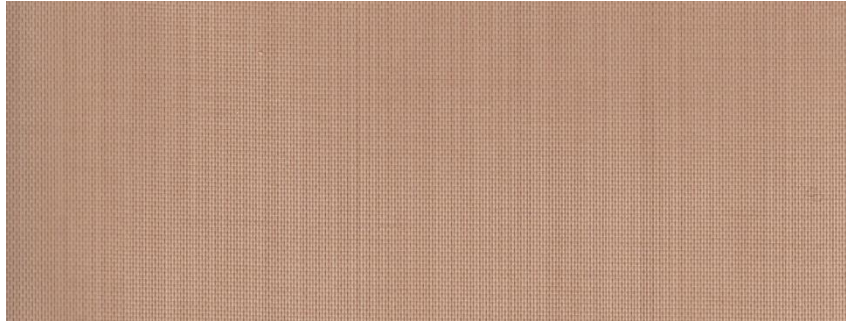

Product	Product category	Coating
PTFE GLASS FABRIC	PREMIUM SERIE	PTFE

Properties	Metric		Imperial	
Standard width(s) <i>Please ask for other widths</i>	1000, 1250	mm	39.5, 49.3	inches
Thickness	0,08	mm	0.0031	inches
Weight	155	gr/m <sup>2</sup>	4,57	oz/sq yd
PTFE content	68	%	68	%
Tensile strength	800	N/5 cm	91	Ibs/inches
Temperature resistance	-150 to 260	°C	-238 to 500	°F

High quality glass fabrics combined with specially formulated high level of PTFE content to produce super smooth, high-gloss surface coating. It has also good abrasion resistance and tensile strength. Applications may include laminate-release sheets, belting for food, electrical insulation and industrial processing. The product can be used in direct contact with food. The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.



Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum. Weight Tolerance g/m<sup>2</sup> = ±%5  
 All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained herein are based on test results FIBERFLON believes to be reliable, but they are not to be construed in any manner as warranties expressed.  
 All data is subject to change without notice.